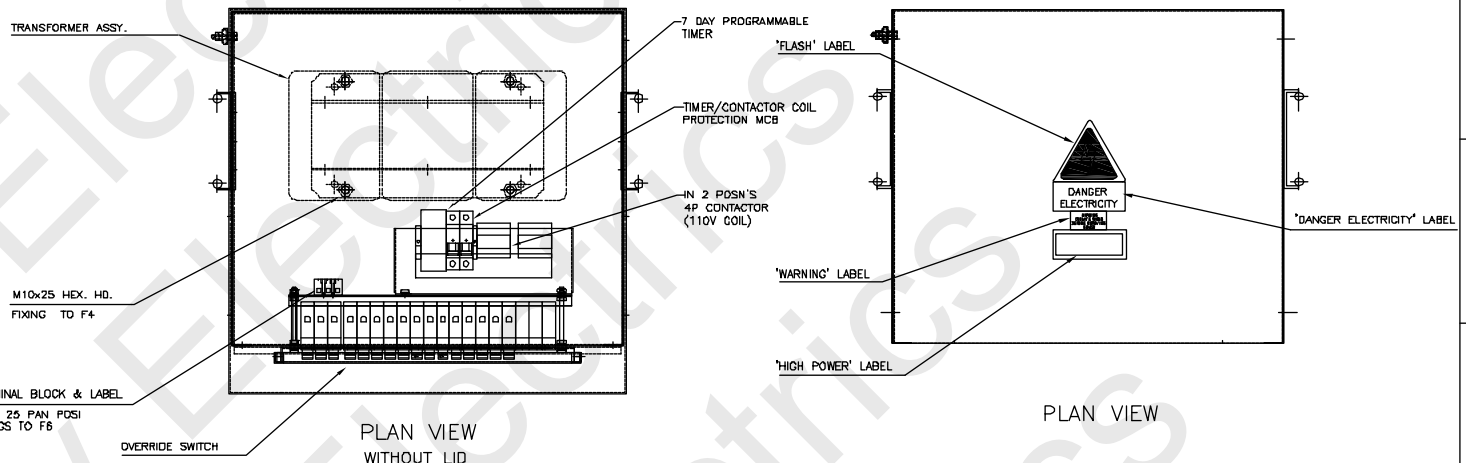

PLAN VIEW
WITHOUT LID

PLAN VIEW

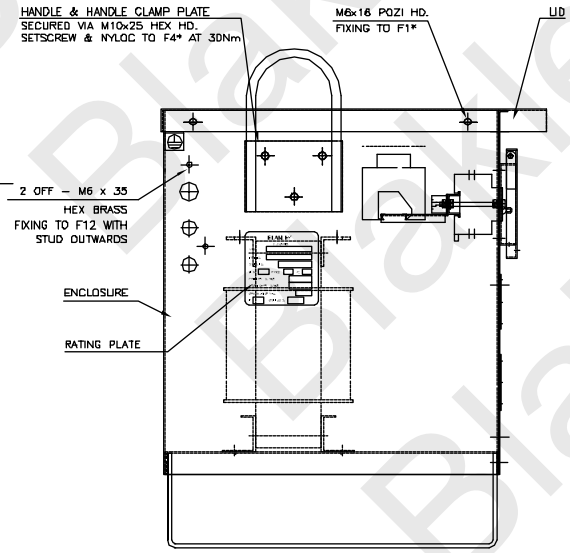

L.H.S. VIEW

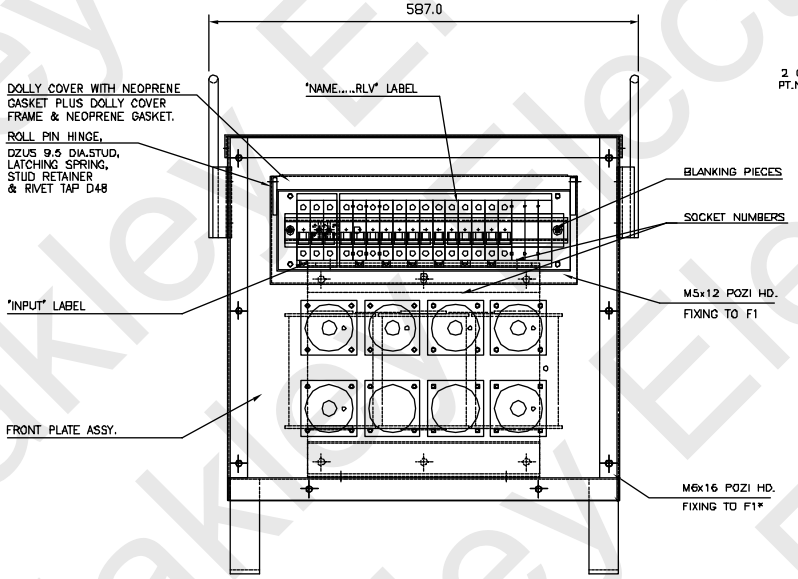

FRONT VIEW

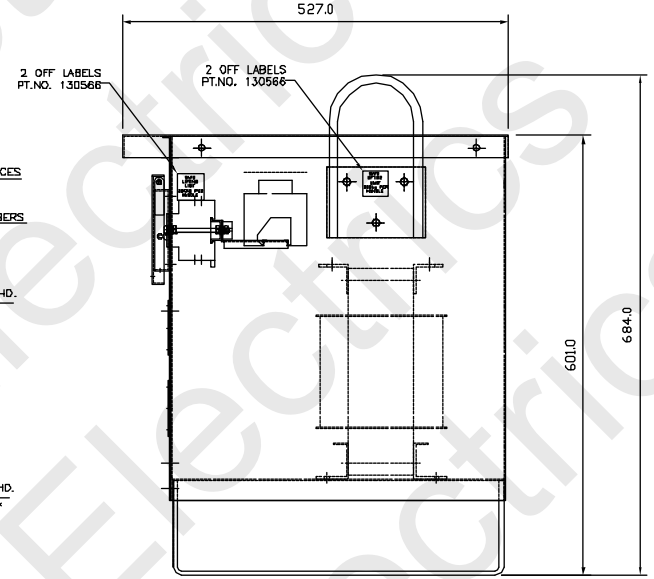

R.H.S. VIEW

NOTES:

1) WIRING CABLE, END TERMINALS, SLEEVES AND OTHER CONSUMABLES ALL AS REQUIRED
2) USE PIN TYPE CONNECTOR TERMINALS FOR TRANSFORMER PRIMARY FLYING LEADS
3) F4* HANDLE FIXINGS WITHOUT SHAKEPROOF/SPRING WASHER AND TIGHTEN TO 30Nm OF TORQUE
4) F1* WASHER ON THIS FIXING TO BE 1/4" TABLE 3 LIGHT CODE 26066 & USE SPRING WASHER
5) NYLON RIVET (3.5 DIA.) USED ON DOLLY FRAME 3.5ø OPTIONAL BLANKING PLATE FIXING HOLES

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT, WITHOUT THEIR WRITTEN CONSENT, BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE.

ISSUED BY DESIGN DEPARTMENT

CUSTOMER INFORMATION COPY

REV:	A	B
EDR:	4838	5274

UNLESS OTHERWISE STATED:-
ALL DIMENSIONS IN MM.
TOLERANCES TO H30052
FIXING STANDARD TO H30051
WIRING STANDARD TO H20051
WELDING STANDARD TO QAI 61.

DO NOT SCALE THIS DRAWING.
IF IN DOUBT, ASK

MATERIAL | SIZE

REF. STD

COPY ISSUED

ORIGINAL SCALE 1:5

DATE 09.07.10

DRN. B.W.

CHKD.

APPD.

BLAKLEY ELECTRICS LIMITED

DRAWING No. B16230

REVISION B

SHEET 1 OF 1

TITLE
GEN. ASSY FOR
10kVA 3PH TA
INC. TIMER/CONTACTORS

A2