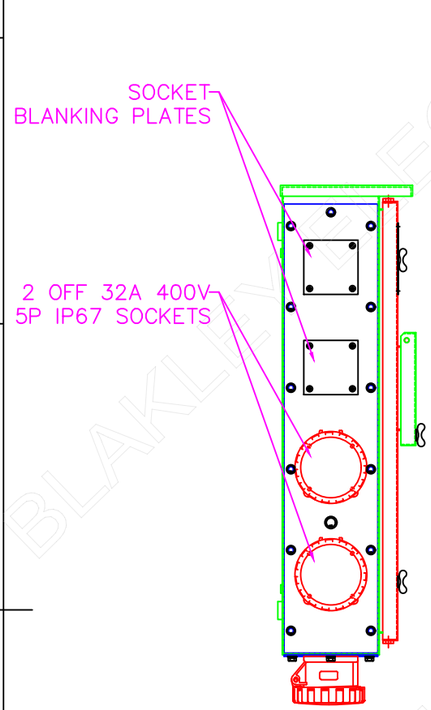

VIEW ON L.H.S

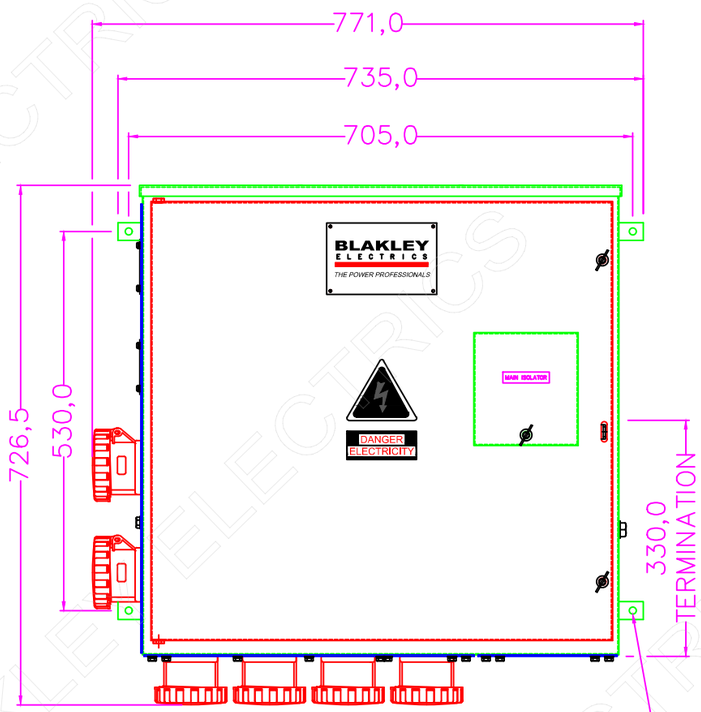

VIEW ON FRONT

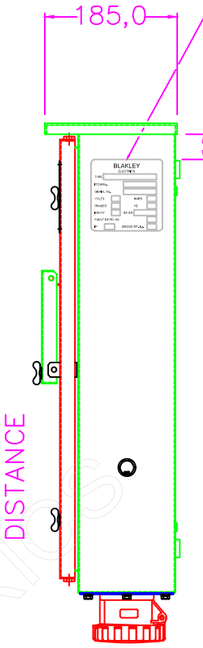

VIEW ON R.H.S

VIEW SHOWING OPTIONAL STAND KIT N.T.S

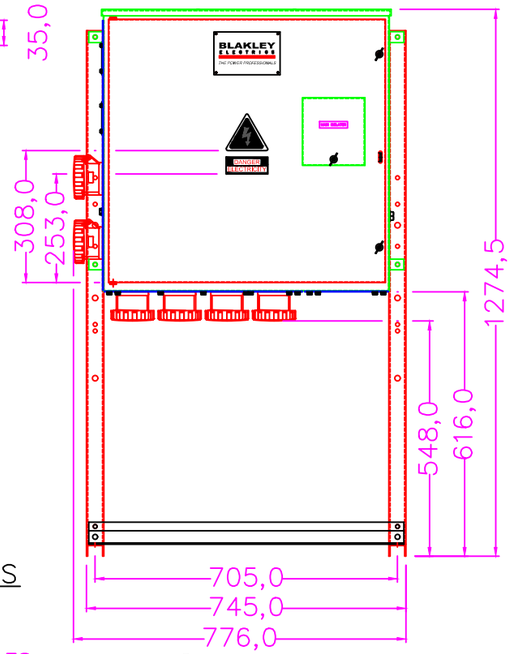

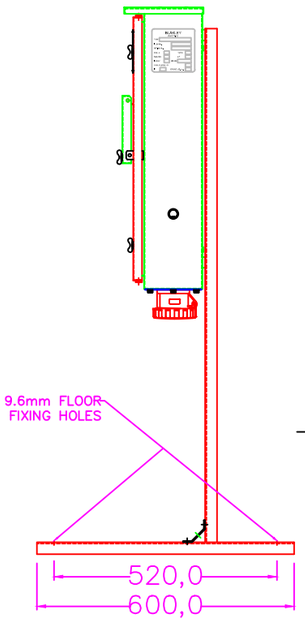

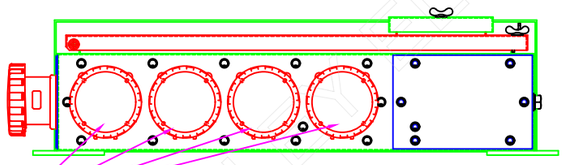

VIEW ON BOTTOM

EXTERNAL M10 HOLES
CAN BE USED FOR MOUNTING
THE ASSEMBLY TO A WALL,
A STAND OR A CRASH FRAME.

CUSTOMER INFORMATION COPY

NOTES:

1) DRAWING SHOWS B2 MDA TYPICAL ENCLOSURE WITH DOLLY COVER DESIGNED TO IP55.
2) FITTED WITH 4P 125A SWITCH DISCONNECTOR WITH TUNNEL TYPE TERMINALS
3) MAXIMUM CABLE SIZE – 50mm SOLID/STRANDED OR 35mm FLEXIBLE
4) FITTED WITH REMOVABLE GLAND PLATES AND SOCKET PLATES.
5) FIT LABELS IN POSITION'S AS DETAILED

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF BLAKLEY ELECTRICS AND MUST NOT WITHOUT THEIR WRITTEN CONSENT BE PASSED ON, COPIED, OR USED FOR ANY OTHER PURPOSE. THIS COPY IS UNCONTROLLED UNLESS OTHERWISE MARKED.

REV:	–
EDR:	–

UNLESS OTHERWISE STATED:–
ALL DIMENSIONS IN MM.
TOLERANCES TO H30052
FIXING STANDARD TO H30051
WIRING STANDARD TO H20051
WELDING STANDARD TO QAI 061.

DO NOT SCALE THIS DRAWING.
IF IN DOUBT, ASK

TITLE
GENERAL ASSEMBLY
B2/I125–4P/C6–RCD
S6–32/IP55

MATERIAL: MILD STEEL
SIZE: A3
REF.: S140488
COPY ISSUED: 19 Nov 2019
ORIGINAL SCALE: 1:8
DATE.: 06/11/19
DRN.: P.R
CHKD.:
APPD.:

BLAKLEY ELECTRICS LIMITED

DRAWING No.: C27994
REVISION: